


Technical requirements:

- 1、 Please use our specified grease;
- 2、 Dimensions with * in the drawing are installation reference dimensions, please follow this installation dimension requirement;
- 3、 Please use the delivery specification drawing to confirm the details of the dimensions.

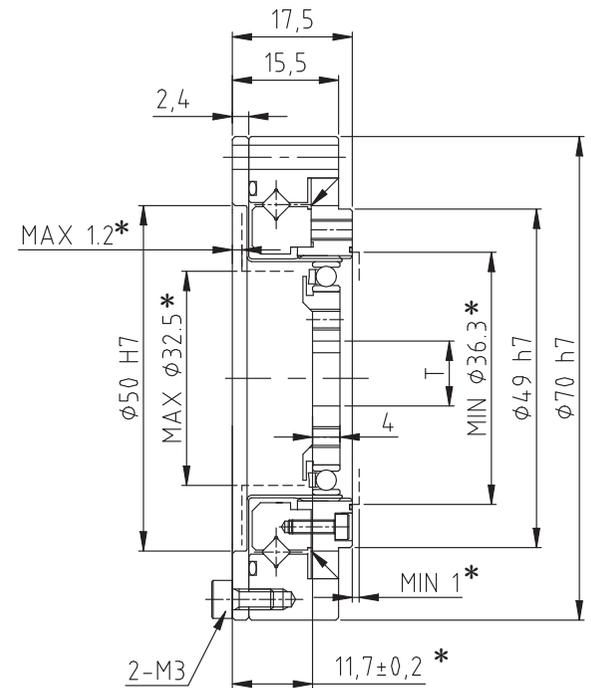

型号/MODEL	U	T	W
Wave generator-A φ6	φ6H7	7°±1	2P9/JS9
Wave generator-A φ8	φ8H7	9.4°±1	3P9/JS9
Wave generator-A φ11	φ11H7		

HSD-14-XX-U-I	Harmonic Drive Model 14		
Homwing	Shenzhen homwing technology co.,ltd 14		

型号 Model	速比 Reduction ratio	输入2000r/min时的 额定转矩 Rated torque at 2000r/min input	启动停止时的 容许峰值转矩 Permissible peak torque at start and stop	平均负载转矩的 容许最大值 Permissible maximum value for average load torque	瞬间容许最大转矩 Permissible maximum momentary torque	容许最高 输入转速 (脂润滑) Permissible maximum input rotational speed(Grease)	容许平均 输入转速 (脂润滑) Permissible average input rotational speed(Grease)	背隙 Backlash	重量 Weight	设计寿命 Desian life
		Nm	Nm	Nm	Nm	r/min	r/min	Arc Sec	Kg	Hour
	50	3.7	12	4.8	23	8500	3500	≤20	HSD-I:0.34	9000
	80	5.1	15	6.2	29					10000
	100	5.4	19	7.7	35					10000