


Technical requirements:

- 1、 Please use our specified grease;
- 2、 Dimensions with * in the drawing are installation reference dimensions, please follow this installation dimension requirement;
- 3、 Please use the delivery specification drawing to confirm the details of the dimensions.

D 向

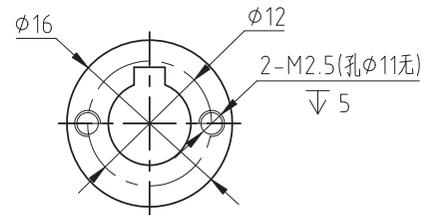

型号/MODEL	U	T	W												
Wave generator-A φ8	φ8H7	9.4 ^{+0.1}	3JS9/P9												
Wave generator-A φ11	φ11H7	12.8 ^{+0.1}	4JS9/P9												
型号 Model	速比 Reduction ratio	输入2000r/min时的 额定转矩 Rated torque at 2000r/min input		启动停止时的 容许峰值转矩 Permissible peak torque at start and stop		平均负载转矩的 容许最大值 Permissible maximum value for average load torque		瞬间容许最大转矩 Permissible maximum momentary torque		容许最高 输入转速 (脂润滑) Permissible maximum input rotational speed(Grease)	容许平均 输入转速 (脂润滑) Permissible average input rotational speed(Grease)	背隙 Backlash	重量 weight	设计寿命 Desian life	
		Nm	kgfm	Nm	kgfm	Nm	kgfm	Nm	kgfm	r/min	r/min	Arc Sec	kg	Hour	
HST-17-XX-U-I	Harmonic Drive Model 17														
Homwing	17	50	16	1.6	34	3.5	26	2.6	70	7.1	7300	3500	≤20	HST-I:0.54	10000
		80	22	2.2	43	4.4	27	2.7	87	8.9					15000
		100	4	2.4	54	5.5	39	4.0	110	11					15000
		120	24	2.4	54	5.5	39	4.0	86	8.8					15000
Shenzhen homwing technology co.,ltd															